



**EDEN LAB**  
LABORATORY SUPPLIES




Authorised Distributor  
For

**RICHTER**  **PTICA**

[contact@edenlab.com.au](mailto:contact@edenlab.com.au)  
[www.edenlab.com.au](http://www.edenlab.com.au)

# Documentation Microscope Camera DCM5.2 - 5.2 Megapixels

---

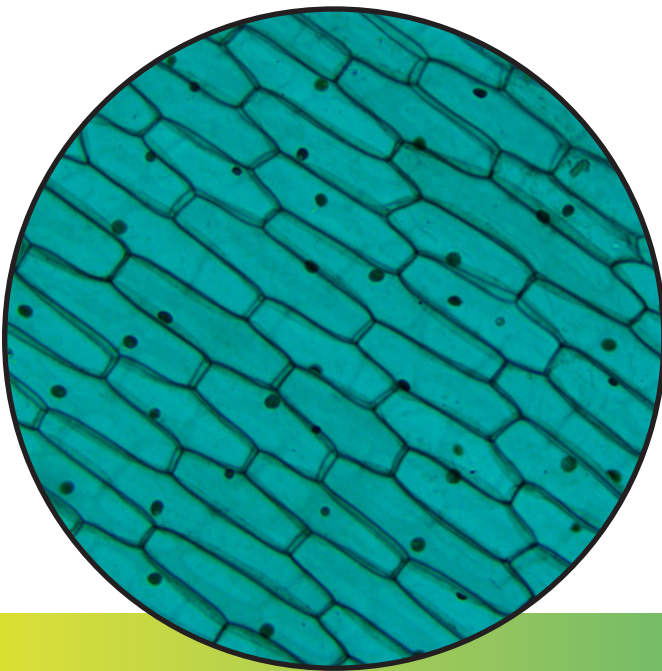



# DCM5.2 Camera Features

## Documentation Camera




This microscope camera was designed for basic image capture, measurement and documentation purposes.

- 5.2 Megapixels
- USB 2.0 Output
- Includes software
- View live images in software
- Capture & Save Images
- Make measurements

## Applications

- Basic Documentation
- Quality Control
- Inspection
- Image Capture
- Measurement

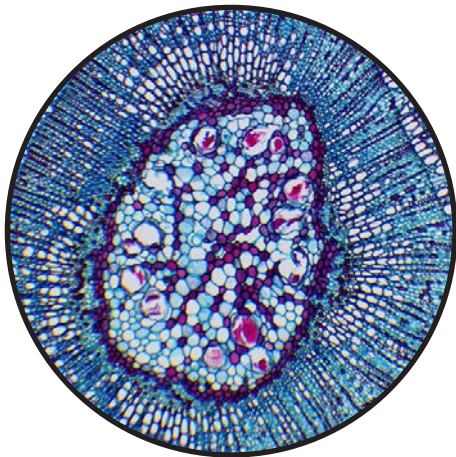

Plant Cells



Spirogyra




# DCM5.2 Software Features



## Image Capture

Capture both still images and motion video.

- Save images as .tiff, .jpg, .bmp, .png, .dcm, .pcx, .tga.
- Save videos as .wmv, .avi, .h264 & .h265 (.mpeg)

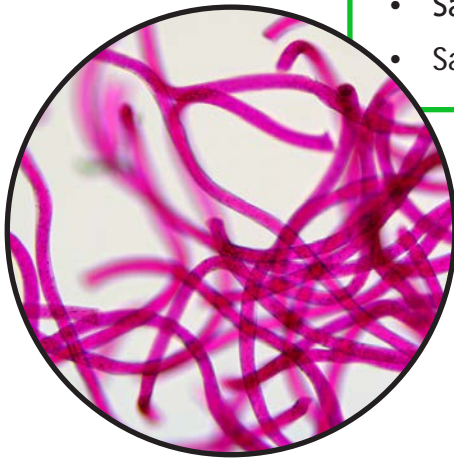

Nylon Fibers

## Basic Software Settings


Some of the basic software features include:

- Exposure, Gain, White Balance
- Saturation, Brightness, Contrast, Gamma
- Color Adjustment
- Power Frequency (anti-flicker)
- Frame Rate Setting
- Image Rotation
- Darkfield Correction
- Image Capture
- Video Capture

## Calibration

Accurate calibration should be performed on each objective lens with a stage micrometer. If using a stereo microscope click stops are the only way to make accurate, repeatable measurements. Available calibration measurement options include:

- Inches (in)
- Meters (m)
- Centimeters (cm)
- Microns ( $\mu\text{m}$ )
- Nanometers (nm)

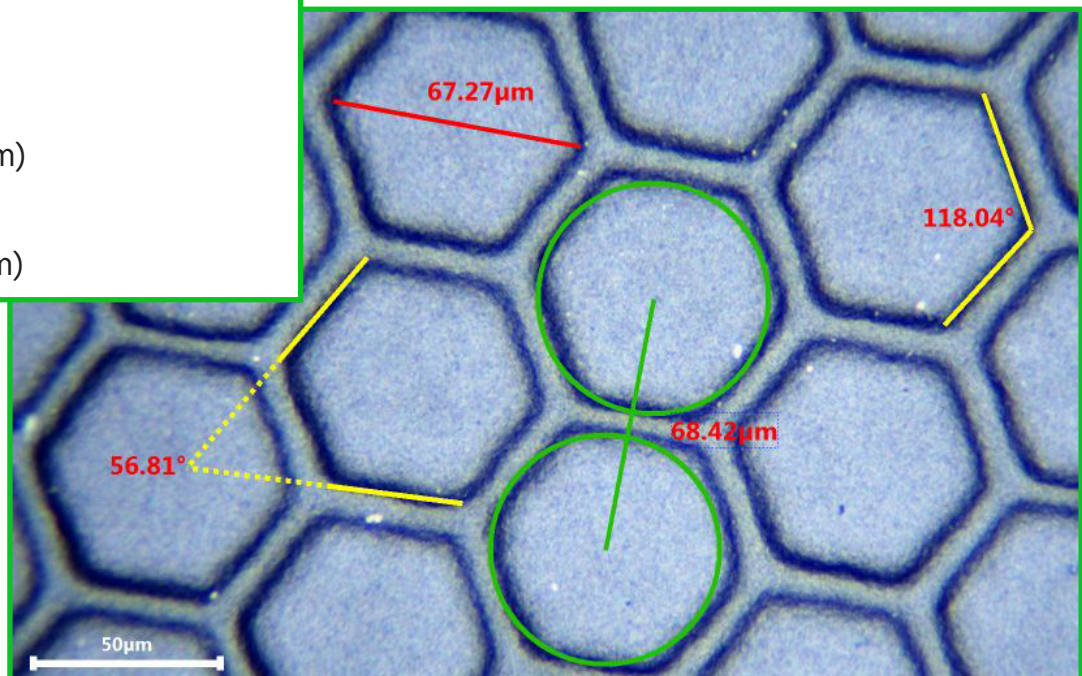




# DCM5.2 Software Features

## Measurement Options

Choose from a large variety of measurement options and tools:

- Angle (3 or 4 points)
- Line
- Parallel
- Two Parallels
- Vertical (3 or 4 points)
- Rectangle
- Ellipse
- Circle
- Annulus
- Arc

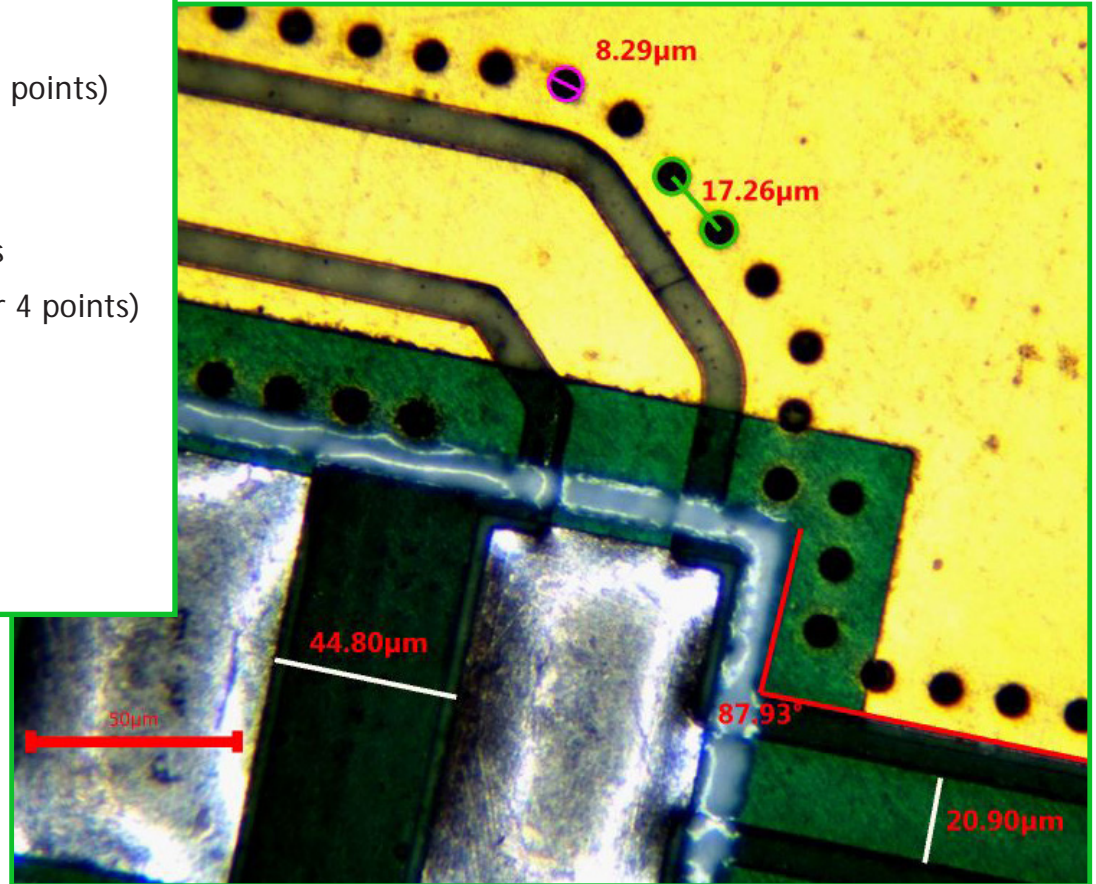

Penny, 30x



Penny, 10x



# DCM5.2 Camera Specifications

Image Sensor	1/2.5" (5.70 x 4.28) Sony Aptina CMOS, USB 2.0
Pixel Size	2.2 x 2.2 $\mu$ m
Resolution	2592 x 1944
Frame Rates	6.8fps @ 2592 x 1944
	18fps @ 1280 x 960
	60fps @ 640 x 480
Binning	1x1, 2x2, 4x4
Exposure	0.294ms~2s
Output	USB 2.0
Spectral Range	380-650nm (with IR-filter)
Power	DC 5V or PC USB Port
USB Controls	White Balance, Auto White Balance, Capture still images or motion video with software, USB works with full use of software on PC or laptop.
Software Features	Image capture, still or motion video.
	Adjustment of white balance, color, frame rate, exposure, gain, flip, sampling, bit depth, ROI, histogram, darkfield correction.
	Annotation
	Measurement and calibration: angles, lines, diameter, polygon, etc.
Operating System for Software (USB)	Windows 7, 8, 10 (32 & 64 bit), Linux, Mac OSX. NOTE: with Mac OSX software only provides basic image management, no measurement or extended features.
PC Requirements (USB)	CPU equal or greater than Intel Core2 2.8GHz
	Memory: 2GB or more.
	USB 2.0 Port
Operating Temp	-10°C~50°C
Storage Temp	-20°C~60°C
Operating Humidity	30~80%RH
Storage Humidity	10~60%RH
Size	80mm x 80mm x 38mm (3.15" x 3.15" x 1.50"), 1lb.



38mm



80mm

info@richter-optica.com  
www.richter-optica.com



- Autoclaves
- Balances & Scales
- Bath & Circulators
- Centrifuges
- Chillers/ Freeze Dryers
- Desiccators
- Filtration Systems
- Furnace/ Burners
- General Lab Equipment
- Glovebox
- Heating & Cooling blocks
- Heating mental/ Temperature controls
- Homogenizers
- Hotplate & Stirrers
- Incubators
- Lab Cabinets & Storage
- Laboratory consumables
- Measurement & Testing  
(pH/ DO/ TDS/ Refractometer/Conductivity)
- Microscope (Research)
  - o Life science Microscope
  - o Geology Microscope
  - o Industrial Inspection Microscope
  - o Material Science Microscope
  - o Microscope Cameras
- Microscope (Educational/ Teaching)
  - o Highschool
  - o College
  - o University
- Ovens
- Pippette
- Plasticwares
- Rangehoods/ Clean Bench, BIO Safety Cabinet
- Recirculating Coolers
- Refrigerator/ Freezers
- Rotary Evaporator
- Rotators
- Shakers/ Mixer/ Roller
- Temperature/ Environment Chambers
- Ultrasonic cleaner
- UV Vis Spectrophotometer
- Vacuum Pump

